

2024

CATALOGUE

UNIVERSAL AIR TOOLS



UNIVERSAL
AIR TOOLS

50TH
YEARS

A close-up of a red tool with a silver label that reads 'Universal Tool' with the company logo.



UNIVERSAL AIR TOOLS

FOLLOW US ONLINE



ABOUT US

In 2023 we celebrate 49 years of quality. We're proud of our reputation for exceptional service and high quality, performance-proven products. Our values have not changed since the Company was founded by Douglas Moppett in 1974: to offer a highly competitive range of air tools with the quality and extensive availability to rival any global brand, while maintaining the trust and ease of doing business which comes from dealing with a traditional family company.

WHY CHOOSE US?

We have a nationwide distributor network and specialist advice just a phone call away. Our service centres and spare parts availability are industry-leading, providing high quality and performance denoted by the UT logo. Our products incorporate the latest features and benefits in air tool design.

As our distributor, you can expect dedicated **Area Sales Managers who are pro-active in helping you to win business.** We have an extensive stock of tools and spare parts in our UK distribution centre, with guaranteed next day delivery if ordered before 2pm. Area Sales Managers also carry stock available for immediate delivery. Our after sales service and support with repairs and warranties is exceptional. You can count on long-term stability, simplicity, fairness and doing business with a company that puts you first, no exceptions.

As an export customer, **you can have the confidence in quality of our internationally respected British air tool brand.** We offer immediate availability from stock and competitive worldwide freight options. Our in-house expertise will provide export documentation such as EU Certificates of Origin certified by the British Chamber of Commerce. Universal Tools are rigorously tested to meet appropriate international standards of safety, including EC Machinery Directive 2006/42/EC.



CONTENTS

All of our tools come complete with a Declaration of Conformity and carry full product liability insurance. Our prominent market position has been won by maintaining an acute interest in our customers' requirements and total specialisation within the pneumatic tool market. Quality control is carried out both in the factories and in-house to ensure that we deliver the consistency of quality that demanding professionals have come to expect from us.



IMPACT WRENCHES	4
DRILLS	11
SCREWDRIVERS	18
SANDERS	25
POLISHERS	33
GRINDERS	35
CUTTING TOOLS	48
HAMMERS	52
NEEDLE & CHISEL SCALERS	57
LONG REACH SCALERS & SCRAPERS	64
SCALING & SCABLING HAMMERS	66
DECK SCALERS & HAMMERS	68
PPT HAND SCARIFIERS	71
VACUUM UNITS	74
SPRAY GUNS	76
RIVETERS	78
MISCELLANEOUS Hoses, Regulators and more	81

IMPACT WRENCHES

UAT has the largest selection of true industrial impact wrenches available in the market. Offering various hammer mechanisms, drive sizes, and torque ranges, our line of impact wrenches can handle any job. Our impact wrenches are designed for quality and dependability, which guarantees consistent performance and a long service life. Impact wrenches cover a wide range of applications including heavy assembly, off-road vehicle maintenance, steel erection, heavy plant maintenance, petrochemical and intermittent MRO.



**LIGHT
INDUSTRIAL**



**HEAVY
INDUSTRIAL**



**AUTOMOTIVE
AND COMMERCIAL**



	Type	Square Drive (in.)	Speed (RPM)	Torque (Nm)	Torque (ft-lb)	Air Cons (CFM)	Length (mm)	Weight (kg)	Sound dB (a)	Vibration Levels (m/sec ²)	Air Inlet (in.) BSP	Page
UT8138	Pin Clutch	1/2"	8000	1100	810	4.2	192	2.1	87	5.3	1/4"	6
UT8176	Twin Hammer	1/2"	6500	1100	810	4.2	185	1.99	88	3.2	1/4"	6
UT8165R	Twin Hammer	1/2"	6500	1085	800	4.2	185	1.9	88	3.2	1/4"	6
UT8175R	Twin Hammer	1/2"	7000	1100	810	4	183	1.9	83	6.8	1/4"	6
UT8326B	Twin Hammer	3/4"	4000	1085	800	6.3	244	3.88	85	3.8	3/8"	7
UT8326-6	Twin Hammer	3/4"	6500	1890	1400	7	210	3.36	91	3.8	3/8"	7
UT8360C-1	Twin Hammer	3/4"	6500	1890	1400	7	210	3.36	91	8.24	3/8"	7
UT8365C	Twin Hammer	3/4"	8500	1898	1400	32	215	3.38	90	14.6	3/8"	7
UT8340C-2	Twin Hammer	3/4"	6000	1489	1100	10	206	4.1	88.9	3.5	3/8"	7
UT8419	Pinless Hammer	1"	4500	2440	1800	12	521	14.5	108.4	9.5	1/2"	8
UT8419S	Pinless Hammer	1"	4500	2440	1800	12	318	11.6	108.4	9.5	1/2"	8
UT8420	Pinless Hammer	1"	4500	3116	2300	12	521	14.5	103	8.9	1/2"	8
UT8420S	Pinless Hammer	1"	4500	3116	2300	12	318	11.6	103	8.9	1/2"	8
UT8468	Twin Hammer	1"	6000	2441	1800	10	547	7.5	96	6.6	1/2"	8
UT8468S	Twin Hammer	1"	6000	2441	1800	10	547	7.5	96	6.6	1/2"	8
UT8468AH	Twin Hammer	1"	6000	2441	1800	10	492	7.5	96	6.6	1/2"	8
UT8468AHS	Twin Hammer	1"	4000	2572	1900	11	300	9	102	9.33	1/2"	8
UT8470C	Twin Hammer	1"	4000	2572	1900	11	300	9	102	9.33	1/2"	9
UT8470C-8	Twin Hammer	1"	4000	2572	1900	11	300	9	102	9.33	1/2"	9
UT150	Twin Hammer	1 1/2"	3000	5288	3900	20	443	16.1	98	9.7	1/2"	9



IMPACT WRENCHES

UT8138

Type Pin Clutch
Square Drive 1/2"
Free Speed 8000 RPM
Max. Torque 1100 Nm (800 ft-lbs)
Air Cons 4.2 CFM

1/2" MEDIUM DUTY IMPACT WRENCH

Length 192 mm
Weight 2.1 Kg
Sound Pressure 87 dB (a)
Vibration Levels 5.3 m/sec²
Air Inlet 1/4 BSP

Also Available:
1/2" MEDIUM DUTY IMPACT WRENCH C/W SOCKETS | UT8138-K1



UT8165R

Type Twin Hammer
Square Drive 1/2"
Free Speed 6500 RPM
Max. Torque 1100 Nm (800 ft-lbs)
Air Cons 4.2 CFM

1/2" HIGH PERFORMANCE INDUSTRIAL IMPACT WRENCH

Length 185 mm
Weight 1.9 kg
Sound Pressure 88 dB (a)
Vibration Levels 3.2 m/sec²
Air Inlet 1/4" BSP

Also Available:
1/2" HIGH PERFORMANCE INDUSTRIAL IMPACT WRENCH C/W SOCKETS | UT8165R-K1



UT8175R

Type Twin Hammer
Square Drive 1/2"
Free Speed 7000 RPM
Max. Torque 1100 RPM (800 ft-lbs)
Air Cons 4.0 CFM

1/2" HIGH PERFORMANCE IMPACT WRENCH

Length 183 mm
Weight 1.9 Kg
Sound Pressure 83 dB (a)
Vibration Levels 6.8 m/sec²
Air Inlet 1/4 BSP

Also Available:
1/2" COMPOSITE IMPACT WRENCH C/W SOCKETS | UT8175R-K1



UT8326

Type Twin Hammer
Square Drive 3/4"
Free Speed 4000 RPM
Max. Torque 1100 Nm (800 ft-lbs)
Air Cons 6.3 CFM

3/4" COMPOSITE IMPACT WRENCH

Length 244 mm
Weight 3.88 kg
Sound Pressure 85 dB (a)
Vibration Levels 4.2 m/sec²
Air Inlet 3/8" BSP

Option Available
3/4" COMPOSITE IMPACT WRENCH C/W SOCKETS | UT8326-K2



	Type	Square Drive (in.)	Speed (RPM)	Torque (Nm)	Torque (ft-lb)	Air Cons (CFM)	Length (mm)	Weight (kg)	Sound dB (a)	Vibration Levels (m/sec ²)	Air Inlet (in.) BSP
UT8138	Pin Clutch	1/2"	8000	1100	800	4.2	192	2.1	87	5.3	1/4"
UT8165R	Twin Hammer	1/2"	6500	1100	800	4.2	185	1.9	88	3.2	1/4"
UT8175R	Twin Hammer	1/2"	7000	1100	800	4	183	1.9	83	6.8	1/4"
UT8326	Twin Hammer	3/4"	4000	1085	800	6.3	244	3.88	85	4.2	3/8"



IMPACT WRENCHES

UT8360C-1

Type Twin Hammer
Square Drive 3/4"
Free Speed 6500 RPM
Max. Torque 1900 Nm (1400 ft-lbs)
Air Cons 7 CFM

3/4" HIGH POWER IMPACT WRENCH

Length 210 mm
Weight 3.36 kg
Sound Pressure 91 dB (a)
Vibration Levels 8.24 m/sec²
Air Inlet 3/8" BSP



Option Available
 3/4" SQ. DR. HIGH POWER IMPACT WRENCH C/W SOCKETS | UT8360C-1-K2

UT8365C

Type Twin Hammer
Square Drive 3/4"
Free Speed 8500 RPM
Max. Torque 1900 Nm (1400 ft-lbs)
Air Cons 32 CFM

3/4" HIGH PERFORMANCE INDUSTRIAL IMPACT WRENCH

Length 215 mm
Weight 3.38 Kg
Sound Pressure 90 dB (a)
Vibration Levels 14.6 m/sec²
Air Inlet 3/8 BSP



Option Available
 3/4" HIGH PERFORMANCE INDUSTRIAL IMPACT WRENCH C/W SOCKETS | UT8365-K2

UT8340C-2

Type Twin Hammer
Square Drive 3/4"
Free Speed 6000 RPM
Max. Torque 1490 Nm (1100 ft-lbs)
Air Cons 10 CFM

3/4" HEAVY DUTY IMPACT WRENCH

Length 206 mm
Weight 4.1 Kg
Sound Pressure 88.9 dB (a)
Vibration Levels 3.5 m/sec²
Air Inlet 3/8 BSP



Option Available
 3/4" HEAVY DUTY IMPACT WRENCH C/W SOCKETS | UT8340C-2-K2

UT8419

Type Pinless Hammer
Square Drive 1"
Free Speed 4500 RPM
Max. Torque 2440 Nm (1800 ft-lbs)
Air Cons 12 CFM

1" INLINE WRENCH 8" ANVIL

Length 521 mm
Weight 14.5 kg
Sound Pressure 108 dB (a)
Vibration Levels 9.5 m/sec²
Air Inlet 1/2" BSP



Option Available
 1" INLINE WRENCH (SHORT ANVIL) | UT8419S

	Type	Square Drive (in.)	Speed (RPM)	Torque (Nm)	Torque (ft-lb)	Air Cons (CFM)	Length (mm)	Weight (kg)	Sound dB (a)	Vibration Levels (m/sec ²)	Air Inlet (in.) BSP
UT8326B	Twin Hammer	3/4"	4000	1085	800	6.3	244	3.88	85	4.2	3/8"
UT8360C-1	Twin Hammer	3/4"	6500	1900	1400	7	210	3.36	91	8.24	3/8"
UT8365C	Twin Hammer	3/4"	8500	1900	1400	32	215	3.38	90	14.6	3/8
UT8340C-2	Twin Hammer	3/4"	6000	1490	1100	10	206	4.1	88.9	3.5	3/8



UT8420

Type Pinless Hammer
Square Drive 1"
Free Speed 4500 RPM (2300 ft-lbs)
Max. Torque 3116 Nm
Air Cons 12 CFM

1" HEAVY DUTY INLINE WRENCH 8" EXTENDED ANVIL

Length 521 mm
Weight 14.5 kg
Sound Pressure 103 dB (a)
Vibration Levels 8.9 m/sec²
Air Inlet 1/2" BSP

Option Available
 1" HEAVY DUTY INLINE WRENCH (SHORT ANVIL) | UT8420S



UT8468

Type Twin Hammer
Square Drive 1"
Free Speed 6000 RPM
Max. Torque 2440 Nm (1800 ft-lbs)
Air Cons 10 CFM

1" INLINE IMPACT WRENCH 8" EXTENDED ANVIL LIGHTWEIGHT

Length 547 mm
Weight 7.5 kg
Sound Pressure 96 dB (a)
Vibration Levels 6.6 m/sec²
Air Inlet 1/2" BSP

Option Available
 1" Impact Wrench Lightweight (Short Anvil) | UT8468S



UT8468AH

Type Twin Hammer
Square Drive 1"
Free Speed 6000 RPM
Max. Torque 2440 Nm (1800 ft-lbs)
Air Cons 10 CFM

***Unique Angle Handle**

1" INLINE IMPACT WRENCH 8" ANVIL LIGHTWEIGHT

Length 492 mm
Weight 7.5 kg
Sound Pressure 96 dB (a)
Vibration Levels 6.6 m/sec²
Air Inlet 1/2" BSP

Option Available
 1" Sq Dr Impact Wrench (2" Anvil) | UT8468AHS



	Type	Square Drive (in.)	Speed (RPM)	Torque (Nm)	Torque (ft-lb)	Air Cons (CFM)	Length (mm)	Weight (kg)	Sound dB (a)	Vibration Levels (m/sec ²)	Air Inlet (in.) BSP
UT8419	Pinless Hammer	1"	4500	2441	1800	12	521	14.5	108	9.5	1/2"
UT8419S	Pinless Hammer	1"	4500	2441	1800	12	521	11.6	108	9.5	1/2"
UT8420	Pinless Hammer	1"	4500	3116	2300	12	521	14.5	103	8.9	1/2"
UT8420S	Pinless Hammer	1"	4500	3116	2300	12	521	11.6	103	8.9	1/2"
UT8468	Twin Hammer	1"	6000	2441	1800	10	547	7.5	96	6.6	1/2"
UT8468S	Twin Hammer	1"	6000	2441	1800	10	547	7.5	96	6.6	1/2"
UT8468AH	Twin Hammer	1"	6000	2441	1800	10	492	7.5	96	6.6	1/2"
UT8468AHS	Twin Hammer	1"	6000	2441	1800	10	378	7.5	96	6.6	1/2"



IMPACT WRENCHES

UT8470C

1" HEAVY DUTY PISTOL WRENCH



Type Twin Hammer
Square Drive 1"
Free Speed 4000 RPM
Max. Torque 2572 Nm
Air Cons 11 CFM

Length 300 mm
Weight 9 kg
Sound Pressure 102 dB (a)
Vibration Levels 9.33 m/sec²
Air Inlet 1/2" BSP

Option Available
1" Heavy Duty Pistol Wrench 8" Anvil | UT8470C-8
1" Heavy Duty Pistol Wrench c/w sockets | UT8470C-K3

UT150

1 - 1/2" INLINE WRENCH



Type Twin Hammer
Square Drive 1 1/2"
Free Speed 3000 RPM
Max. Torque 5288 Nm
Air Cons 20 CFM

Length 443 mm
Weight 16.1 kg
Sound Pressure 98 dB (a)
Vibration Levels 9.7 m/sec²
Air Inlet 1/2" BSP

	Type	Square Drive (in.)	Speed (RPM)	Torque (Nm)	Torque (ft-lb)	Air Cons (CFM)	Length (mm)	Weight (kg)	Sound dB (a)	Vibration Levels (m/sec ²)	Air Inlet (in.) BSP
UT8470C	Twin Hammer	1"	4000	2572	1900	11	300	9	102	9.33	1/2"
UT8470C-8	Twin Hammer	1"	4000	2572	1900	11	300	9.6	102	9.33	1/2"
UT150	Twin Hammer	1 - 1/2"	3000	5288	3900	20	443	16.1	98	9.7	1/2"

IMPACT WRENCHES - AVAILABLE COMBINATIONS

PRODUCT CODE	With Protective Boot	With Sockets	2" Anvil Available	6" Anvil Available	8" Anvil Available
UT8138	UT8138B	UT8138-K1	-	-	-
UT8176B	UT8176B	UT8176-K1	-	-	-
UT8165R	UT8165RB	UT8165R-K1	-	-	-
UT8175R	UT8175RB	UT8175R-K1	-	-	-
UT8326	UT8326B	UT8326-K2	-	UT8326-6	-
UT8360C-1	-	UT8360C-1-K2	-	-	-
UT8365C	-	UT8365C-K2	-	-	-
UT8340C-2	-	UT8340C-2-K2	-	-	-
UT8419	-	UT8419-K3	UT8419S	-	UT8419
UT8420	-	UT8420-K3	UT8420S	-	UT8420
UT8468 / UT8468AH	-	UT8468-K3/ UT8468AH-K3	UT8468-S / UT8468AHS	-	UT8468/ UT8468AH
UT8470C	-	UT8470C-K3	-	-	UT8470C-8
UT150	-	-	-	-	-



IMPACT WRENCHES ACCESSORIES

Sockets



3/8", 1/2", 3/4" & 1" SINGLE AND DOUBLE DEPTH SOCKETS

3/8"

- 8 mm SM3808
- 9 mm SM3809
- 10 mm SM3810
- 11 mm SM3811
- 12 mm SM3812
- 13 mm SM3813
- 14 mm SM3814
- 15 mm SM3815

1/2"

- 10 mm SM1210
- 11 mm SM1211
- 12 mm SM1212
- 13 mm SM1213
- 14 mm SM1214
- 15 mm SM1215
- 16 mm SM1216
- 17 mm SM1217
- 18 mm SM1218
- 19 mm SM1219
- 20 mm SM1220
- 21 mm SM1221
- 22 mm SM1222
- 23 mm SM1223
- 24 mm SM1224
- 25 mm SM1225
- 26 mm SM1226
- 27 mm SM1227

For deep sockets
add DD

Example : **SM1212DD**

3/4"

- 24 mm SM3424
- 26 mm SM3426
- 27 mm SM3427
- 28 mm SM3428
- 29 mm SM3429
- 30 mm SM3430
- 32 mm SM3432
- 33 mm SM3433
- 34 mm SM3434
- 35 mm SM3435
- 36 mm SM3436
- 38 mm SM3438

1"

- 27 mm SM127
- 28 mm SM128
- 29 mm SM129
- 30 mm SM130
- 32 mm SM132
- 33 mm SM133
- 34 mm SM134
- 35 mm SM135
- 36 mm SM136
- 37 mm SM137
- 38 mm SM138
- 41 mm SM141
- 46 mm SM146

For short sockets
add SD

Example: **SM1212SD**

SOCKET SETS

H0082 - 1/2" SQUARE DRIVE SINGLE DEPTH IMPACT SOCKET SET:

12, 13, 14, 15, 16, 17, 18, 19, 21, 22 and 24 mm



H0082-MM - 1/2" SQUARE DRIVE DOUBLE DEPTH IMPACT SOCKET SET:

12, 13, 14, 15, 16, 17, 18, 19, 21, 22 and 24 mm



H0086-1 - 3/4" SQUARE DRIVE DOUBLE DEPTH:

27, 29, 30, 32, 33, 36 and 38 mm



H0093-1 - 1" SQUARE DRIVE DOUBLE DEPTH:

27, 29, 30, 32, 33, 36 and 38 mm



H0095 - 1" SQUARE DRIVE DOUBLE DEPTH:

27, 30, 32 and 33 mm



SOCKET ADAPTORS

- 3/8" female to 1/2" male SA38F12M
- 1/2" female to 3/8" male SA12F38M
- 1/2" female to 3/4" male SA12F34M
- 3/4" female to 1/2" male SA34F12M
- 3/4" female to 1" male SA34F1M
- 1" female to 3/4" male SA1F34M
- 1 1/2" female to 1" male SA112F1M



EXTENSION BARS

- 3/8" square drive 3" EX383, 6" EX386
- 1/2" square drive 3" EX123, 6" EX126, 10" EX1210, 12" EX1212
- 3/4" square drive 6" EX346, 6" EX348, 10" EX3410, 12" EX3412
- 1" square drive 6" EX16, 8" EX18, 10" EX110, 12" EX112



UNIVERSAL JOINTS

- 3/8" square drive UJ38
- 1/2" square drive UJ12
- 3/4" square drive UJ34
- 1" square drive UJ1



sales@ut-tools.com

DRILLS

The Universal Air Tool line of drills offers a selection of fully enclosed gear and planetary gear drives. Various models within the UAT drill series feature our "soft touch" coating; or comfort grips which provide insulation to the operator, along with reduced vibration. Handle design and balance are key features; these features coupled with our precision ported throttle design offer optimum operator comfort and control in continuous processes. We use the highest grade materials, bearings, needle bearings and precision gears to meet customer expectations for quality and dependability.

	Chuck Type	Chuck Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Pages
UT8894	Chuck & Key	1/4"	0.90	6000	4.6	83	3.6	193	0.9	1/4"	16
UT8897	Chuck & Key	1/4"	0.90	20,000	4.6	85	3.6	193	0.9	1/4"	16
UT5825	Chuck & Key	3/8"	0.40	1800	4	91	<2.5	159	1.36	1/4"	16
UT2815-R	Keyless	3/8"	0.75	1800	4	91	1.2	223	1.2	1/4"	16
UT8821	Keyless	3/8"	0.50	2600	3.7	91	1.2	193	0.90	1/4"	17
UT8817	Keyless	3/8"	0.40	1700	3.7	76	4	159	0.92	1/4"	17
UT8833R-1	Chuck & Key	3/8"	0.65	1800	3.5	84	2.1	163	1.10	1/4"	17
UT8818	Keyless	1/2"	0.50	750	4	76	<2.5	159	1.2	1/4"	18
UT8840R-1	Chuck & Key	1/2"	0.75	800	3.5	84	2.5	216	1.30	1/4"	18
UT8841	Keyless	3/8"	0.50	3600	3.7	86	3.6	223	0.80	1/4"	18
UT8741A	Keyless	3/8"	0.40	4500	4	94	<2.5	220	1.0	1/4"	18
UT8807B	Chuck & Key	3/8"	0.50	1300	4	83.8	<2.5	202	1.2	1/4"	19
UT8806	Keyless	3/8"	0.50	1800	3.7	84	3.6	223	1.2	1/4"	19
HP17RD	Chuck & Key	5/8"	2.90	1000	10	85	12	380	4.60	3/8"	19

DRILLS

UT8894

Chuck Type Chuck & Key
Chuck Size 1/4"
Motor Power 0.90 HP
Free Speed 6000 RPM
Air Cons 4.6 CFM

1/4" NON REVERSIBLE DRILL

Sound 85 dB (a)
Vibration 3.6 m/sec²
Length 193 mm
Weight 0.9 kg
Air Inlet 1/4" BSP



UT8897

Chuck Type Chuck & Key
Chuck Size 1/4"
Motor Power 0.90 HP
Free Speed 20,000 RPM
Air Cons 4.6 CFM

1/4" NON REVERSIBLE DRILL

Sound 83 dB (a)
Vibration 3.6 m/sec²
Length 193 mm
Weight 0.9 kg
Air Inlet 1/4" BSP



UT5825

Chuck Type Chuck & Key
Chuck Size 3/8"
Motor Power 0.40 HP
Free Speed 1800 RPM
Air Cons 4 CFM

3/8" REVERSIBLE DRILL

Sound 91 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 1.36 kg
Air Inlet 1/4" BSP



UT2815-R

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.75 HP
Free Speed 1800 RPM
Air Cons 4 CFM

3/8" REVERSIBLE DRILL

Sound 91 dB (a)
Vibration 1.2 m/sec²
Length 223 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



	Chuck Type	Chuck Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8894	Chuck & Key	1/4"	0.90	6000	4.6	85	3.6	193	0.9	1/4"
UT8897	Chuck & Key	1/4"	0.90	20,000	4.6	83	3.6	193	0.9	1/4"
UT5825	Chuck & Key	3/8"	0.50	1800	4	91	2.5	159	1.36	1/4"
UT2815-R	Keyless	3/8"	0.75	1800	4	91	1.2	223	1.2	1/4"

DRILLS

UT8821

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.50 HP
Free Speed 2600 RPM
Air Cons 3.7 CFM

3/8" NON REVERSIBLE DRILL

Sound 91 dB (a)
Vibration 1.2 m/sec²
Length 193 mm
Weight 0.90 kg
Air Inlet 1/4" BSP



UT8817

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.40 HP
Free Speed 1700 RPM
Air Cons 4 CFM

3/8" REVERSIBLE DRILL

Sound 76 dB (a)
Vibration 2.5 m/sec²
Length 178 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



UT8833R-1

Chuck Type Chuck & Key
Chuck Size 3/8"
Motor Power 0.65 HP
Free Speed 1800 RPM
Air Cons 3.5 CFM

3/8" REVERSIBLE DRILL

Sound 84 dB (a)
Vibration 2.1 m/sec²
Length 163 mm
Weight 1.10 kg
Air Inlet 1/4" BSP



	Chuck Type	Chuck Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8821	Keyless	3/8"	0.50	2600	3.7	91	1.2	193	0.90	1/4"
UT8817	Keyless	3/8"	0.40	1700	4	76	2.5	178	1.1	1/4"
UT8833R-1	Chuck & Key	3/8"	0.65	1800	3.5	84	2.1	163	1.10	1/4"

UT2855-R

Chuck Type Keyless
Chuck Size 1/2"
Motor Power 0.75 HP
Free Speed 450 RPM
Air Cons 4 CFM

1/2" REVERSIBLE DRILL - 450 RPM

Sound 86 dB (a)
Vibration <2.5 m/sec²
Length 220.5 mm
Weight 1.4 kg
Air Inlet 1/4" BSP



UT2855-R-7

Chuck Type Keyless
Chuck Size 1/2"
Motor Power 0.75 HP
Free Speed 700 RPM
Air Cons 4 CFM

1/2" REVERSIBLE DRILL - 700 RPM

Sound 86 dB (a)
Vibration <2.5 m/sec²
Length 220.5 mm
Weight 1.4 kg
Air Inlet 1/4" BSP



UT8818

Chuck Type Keyless
Chuck Size 1/2"
Motor Power 0.50 HP
Free Speed 750 RPM
Air Cons 4 CFM

1/2" REVERSIBLE DRILL

Sound 76 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



UT8840R-1

Chuck Type Chuck & Key
Chuck Size 1/2"
Motor Power 0.75 HP
Free Speed 800 RPM
Air Cons 3.5 CFM

1/2" REVERSIBLE DRILL

Sound 84 dB (a)
Vibration 2.5 m/sec²
Length 216 mm
Weight 1.30 kg
Air Inlet 1/4" BSP



	Chuck Type	Chuck Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8818	Keyless	1/2"	0.50	750	4	76	2.5	159	1.2	1/4"
UT8840R-1	Chuck & Key	1/2"	0.75	800	3.5	84	2.5	216	1.30	1/4"
UT8841	Keyless	3/8"	0.50	3600	3.7	86	3.6	223	0.80	1/4"
UT8741A	Keyless	3/8"	0.40	4500	4	94	<2.5	220	1	1/4"

DRILLS

UT8841

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.50 HP
Free Speed 3600 RPM
Air Cons 3.7 CFM

3/8" NON REVERSIBLE STRAIGHT DRILL

Sound 86 dB (a)
Vibration 3.6 m/sec²
Length 223 mm
Weight 0.80 kg
Air Inlet 1/4" BSP



UT8741A

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.40 HP
Free Speed 4500 RPM
Air Cons 4 CFM

3/8" NON REVERSIBLE STRAIGHT DRILL

Sound 94 dB (a)
Vibration <2.5 m/sec²
Length 220 mm
Weight 1.0 kg
Air Inlet 1/4" BSP



UT8807B

Chuck Type Chuck & Key
Chuck Size 3/8"
Motor Power 0.5 HP
Free Speed 1300 RPM
Air Cons 4 CFM

3/8" REVERSIBLE ANGLED DRILL

Sound 83.8 dB (a)
Vibration <2.5 m/sec²
Length 202 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



UT8806

Chuck Type Keyless
Chuck Size 3/8"
Motor Power 0.50 HP
Free Speed 1800 RPM
Air Cons 3.7 CFM

3/8" NON REVERSIBLE ANGLED DRILL

Sound 84 dB (a)
Vibration 3.6 m/sec²
Length 223 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



HP17RD

Chuck Type Chuck & Key
Chuck Size 5/8"
Motor Power 2.90 HP
Free Speed 1000 RPM
Air Cons 10 CFM

5/8" INDUSTRIAL REVERSIBLE DRILL

Sound 85 dB (a)
Vibration 12 m/sec²
Length 380 mm
Weight 4.6 kg
Air Inlet 3/8" BSP



	Chuck Type	Chuck Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8807B	Chuck & Key	3/8"	0.50	1800	14	83.8	<2.5	178	1.1	1/4"
UT8806	Keyless	3/8"	0.50	1800	3.7	84	3.6	223	1.2	1/4"
HP17RD	Chuck & Key	5/8"	2.90	1000	10	85	12	380	4.60	3/8"

DRILLS - AVAILABLE COMBINATIONS

	3/8" Chuck & Key	3/8" Keyless	1/2" Chuck & Key	1/2" Keyless
UT8894	-	-	-	-
UT8897	-	-	-	-
UT5825	UT5825	UT5825-K	UT5825-1/2	UT5825-1/2K
UT2815-R	UT2815-R-CK	UT2815-R	UT2815-R-1/2CK	UT2815-R-1/2
UT8821	UT8821-CK	UT8821	UT8821-1/2CK	UT8821-1/2
UT8817	UT8817-CK	UT8817	UT8817-1/2-CK	UT8817-1/2
UT8833R-1	UT8833R-1	UT8833R-K-1	UT8833R-1/2-1	UT8833R-1/2K-1
UT8841	UT8841-CK	UT8841	UT8841-1/2-CK	UT8841-1/2
UT8741A	UT8741A	UT8741A-K	-	-
UT8806	UT8806-CK	UT8806	UT8806-1/2CK	UT8806-1/2
UT8807B	UT8807B	UT8807-BK	UT8807-B1/2	UT8807-B1/2K
UT8840R-1		-	UT8840R-1	UT8840R-K-1
UT8818	UT8818-3/8-CK	UT8818-3/8K	UT8818-CK	UT8818
HP17RD	-	-	-	-

DRILL ACCESSORIES - CHUCKS & KEYLESS CHUCKS

3/8" Chuck & Key - 3/8" UNF mount - all models H0019

3/8" Chuck Key (for use with H0019) H0023

3/8" Keyless Chuck - 3/8" UNF mount - all models H0019K

1/2" Chuck & Key - 3/8" UNF mount - all models H0020

1/2" Chuck Key (for use with H0020) H0024

1/2" Keyless Chuck - 3/8" UNF mount - all models H0020K

5/8" Tapered Chuck & Key - (HP17RD) H0122



**AT UNIVERSAL AIR TOOLS YOU CAN
FIND A WIDE SELECTION OF DRILLS
FOR ALL KINDS OF JOBS!**



SCREWDRIVERS

A selection of screwdrivers are available in the Universal Air Tool line, featuring automatic shut-off models; straight and "Air on Top" models; as well as pistol grip positive drive and direct drive models. The precision ported throttle design from UAT adds to the control. Our screwdrivers, impact drivers, hold and drive tools, and ratchets cover a range of speeds, torques, and drive mechanisms required for high-volume continuous assembly processes, airframe and aerospace applications, as well as intermittent maintenance needs.

	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT8957	Trigger Start - Auto Shut Off	Pistol	1/4"	0.95 - 6	1400	4	72	2.5	215	0.95	1/4"	23
UT8958	Trigger Start - Auto Shut Off	Pistol	1/4"	0.5 - 2.5	1000	4	72	2.5	180	0.65	1/4"	23
UT8959	Trigger Start - Auto Shut Off	Pistol	1/4"	1.2 - 7.5	1000	4	72	2.5	180	0.65	1/4"	23
UT8962	Trigger Start - Auto Shut Off	Pistol	1/4"	3 - 20	300	4	76.4	2.5	215	1.10	1/4"	23
UT8963	Trigger Start - Auto Shut Off	Pistol	1/4"	5 - 30	250	4	76.4	2.5	215	1.10	1/4"	24
UT8905	Trigger Start - Auto Shut Off	Straight	1/4"	0.05-0.2	1800	4	91	<2.5	159	1.36	1/4"	24
UT8906	Push Start - Auto Shut Off	Straight	1/4"	0.8 - 4	800	2	72	2.5	180	0.43	1/4"	24
UT8956	Push Start - Auto Shut Off	Straight	1/4"	1 - 7	1000	4	78	2.5	217	0.77	1/4"	24
UT8960	Lever Start - Auto Shut Off	Angle	1/4"	0.5 - 3	1000	3	74	2.5	270	0.66	1/4"	25
UT8961NR	Lever Start - Auto Shut Off	Angle	3/8"	5 - 10	400	4	78	1.8	254	1.30	1/4"	25
UT8961	Lever Start - Auto Shut Off	Angle	1/4"	3 - 18	300	3	78	2.5	235	1.40	1/4"	25
UT8961-2	Lever Start - Auto Shut Off	Angle	1/4"	3 - 18	400	4	78	1.8	254	1.30	1/4"	25
UT2960A	Slip Clutch	Pistol	1/4"	3-11	800	4	87	<2.5	159	1.1	1/4"	26
UT2964A	Slip Clutch	Pistol	1/4"	3-8	1800	4	87	<2.5	205	1.1	1/4"	26
UT5964A	Slip Clutch	Pistol	1/4"	Max 8	1800	4	84.3	<2.5	190	1	1/4"	26
UT8964A	Slip Clutch	Pistol	1/4"	5 - 12	1800	4	84.3	2.5	197	1.30	1/4"	26
UT8955	Slip Clutch	Straight	1/4"	Max 10	1800	4	83	2.5	228	1.10	1/4"	27
UT5825-S	Direct Drive	Pistol	1/4"	Max 3.4	1800	4	91	<2.5	156	1.36	1/4"	27
UT8817-S	Direct Drive	Pistol	1/4"	Max 7	1700	4	76	2.5	159	0.92	1/4"	27
UT8817-SC	Direct Drive	Pistol	1/4"	Max 7	1700	4	76	2.5	159	0.92	1/4"	27
UT8818-S	Direct Drive	Pistol	1/4"	Max 13	1700	4	76	2.5	159	0.92	1/4"	28
UT8818-SC	Direct Drive	Pistol	1/4"	Max 13	1700	4	76	2.5	159	0.92	1/4"	28
UT8226	Impact Clutch	Pistol	1/4"	Max 271	9500	3	88	4.70	165	1.38	1/4"	28

SCREWDRIVER CLUTCH MECHANISMS

Adjustable Auto Shut-off Clutch

Designed for precision joints, the shut-off clutch provides smooth disengagement at preset torque, while minimizing vibration.

Direct Drive Clutch

Designed for non critical torque soft joint applications, in wood and metal, where torque is controlled by the operator.

Positive Jaw Clutch

Designed for soft high torque joints where torque applied needs to exceed the clamping force; such as in wood or when using self tapping fasteners. Torque is controlled by the operator, or by air pressure adjustments.

Twin Hammer Clutch

Designed to overcome high prevailing torque; Ideal for self tapping fasteners.

SCREWDRIVERS

UT8957

Type Pistol
Size 1/4"
Torque 0.95 - 6 Nm
Free Speed 1400 RPM
Air Cons 4 CFM

COMPOSITE SCREWDRIVER

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 215 mm
Weight 0.95 kg
Air Inlet 1/4" BSP



UT8958

Type Pistol
Size 1/4"
Torque 0.5-2.5 Nm
Free Speed 1000 RPM
Air Cons 4 CFM

COMPOSITE SCREWDRIVER

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 180 mm
Weight 0.65 kg
Air Inlet 1/4" BSP



UT8959

Type Pistol
Size 1/4"
Torque 0.5-2.5 Nm
Free Speed 1000 RPM
Air Cons 4 CFM

COMPOSITE SCREWDRIVER

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 180 mm
Weight 0.65 kg
Air Inlet 1/4" BSP



UT8962

Type Pistol
Size 1/4"
Torque 3-20 Nm
Free Speed 300 RPM
Air Cons 4 CFM

COMPOSITE SCREWDRIVER

Sound 76.4 dB (a)
Vibration 2.5 m/sec²
Length 215 mm
Weight 1.10 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8957	Trigger Start - Auto Shut Off	Pistol	1/4"	0.95 - 6	1400	4	72	2.5	215	0.95	1/4"
UT8958	Trigger Start - Auto Shut Off	Pistol	1/4"	0.5 - 2.5	1000	4	72	2.5	180	0.65	1/4"
UT8959	Trigger Start - Auto Shut Off	Pistol	1/4"	1.2 - 7.5	1000	4	72	2.5	180	0.65	1/4"
UT8962	Trigger Start - Auto Shut Off	Pistol	1/4"	3 - 20	300	4	76.4	2.5	215	1.10	1/4"

SCREWDRIVERS

UT8963

Type Pistol
Size 1/4"
Torque 5-30 Nm
Free Speed 250 RPM
Air Cons 4 CFM

COMPOSITE SCREWDRIVER

Sound 76.4 dB (a)
Vibration 2.5 m/sec²
Length 215 mm
Weight 1.10 kg
Air Inlet 1/4" BSP



UT8905

Type Straight
Size 1/4"
Torque 0.05 - 0.2 Nm
Free Speed 1000 RPM
Air Cons 2 CFM

PUSH TO START AUTO SHUT-OFF SCREWDRIVER

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 180 mm
Weight 0.43 kg
Air Inlet 1/4" BSP



UT8906

Type Straight
Size 1/4"
Torque 0.8 - 4 Nm
Free Speed 800 RPM
Air Cons 2 CFM

PUSH TO START AUTO SHUT-OFF SCREWDRIVER

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 180 mm
Weight 0.43 kg
Air Inlet 1/4" BSP



UT8956

Type Straight
Size 1/4"
Torque 1-7 Nm
Free Speed 1000 RPM
Air Cons 4 CFM

PUSH TO START AUTO SHUT-OFF SCREWDRIVER

Sound 83 dB (a)
Vibration 2.5 m/sec²
Length 217 mm
Weight 0.77 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8963	Trigger Start - Auto Shut Off	Pistol	1/4"	5 - 30	250	4	76.4	2.5	215	1.10	1/4"
UT8905	Push Start - Auto Shut Off	Straight	1/4"	0.05-0.2	1800	4	91	<2.5	159	1.36	1/4"
UT8906	Push Start - Auto Shut Off	Straight	1/4"	0.8 - 4	800	2	72	2.5	180	0.43	1/4"
UT8956	Push Start - Auto Shut Off	Straight	1/4"	1 - 7	1000	4	78	2.5	217	0.77	1/4"

SCREWDRIVERS

UT8960

Type Angle
Size 1/4"
Torque 0.5-3 Nm
Free Speed 1000 RPM
Air Cons 3 CFM

AUTO SHUT-OFF PRECISION NUT RUNNER

Sound 74 dB (a)
Vibration 2.5 m/sec²
Length 270 mm
Weight 0.66 kg
Air Inlet 1/4" BSP



UT8961

Type Angle
Size 1/4"
Torque 3-18 Nm
Free Speed 300 RPM
Air Cons 3 CFM

AUTO SHUT-OFF PRECISION NUT RUNNER

Sound 78 dB (a)
Vibration 2.5 m/sec²
Length 235 mm
Weight 1.40 kg
Air Inlet 1/4" BSP



UT8961NR

Type Angle
Size 3/8"
Torque 5-10 Nm
Free Speed 400 RPM
Air Cons 4 CFM

AUTO SHUT-OFF PRECISION NUT RUNNER

Sound 78 dB (a)
Vibration 1.8 m/sec²
Length 254 mm
Weight 1.30 kg
Air Inlet 1/4" BSP



UT8961-2

Type Angle
Size 1/4"
Torque 3-18 Nm
Free Speed 400 RPM
Air Cons 4 CFM

AUTO SHUT-OFF PRECISION NUT RUNNER

Sound 78 dB (a)
Vibration 1.8 m/sec²
Length 254 mm
Weight 1.30 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8960	Lever Start - Auto Shut Off	Angle	1/4"	0.5 - 3	1000	3	74	2.5	270	0.66	1/4"
UT8961	Lever Start - Auto Shut Off	Angle	1/4"	3 - 18	300	3	78	2.5	235	1.40	1/4"
UT8961NR	Lever Start - Auto Shut Off	Angle	3/8"	5 - 10	400	4	78	1.8	254	1.30	1/4"
UT8961-2	Lever Start - Auto Shut Off	Angle	1/4"	3 - 18	400	4	78	1.8	254	1.30	1/4"

SCREWDRIVERS

UT2960A

Type Pistol
Size 1/4"
Torque 3-11 Nm
Free Speed 800 RPM
Air Cons 4 CFM

1/4" HEX ADJUSTABLE CLUTCH SCREWDRIVER

Sound 87 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



UT2964A

Type Pistol
Size 1/4"
Torque 3-8 Nm
Free Speed 1800 RPM
Air Cons 4 CFM

1/4" ADJUSTABLE CLUTCH SCREWDRIVER UNIVERSAL

Sound 87 dB (a)
Vibration <2.5 m/sec²
Length 205 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



UT5964A

Type Pistol
Size 1/4"
Torque 10.8 Nm
Free Speed 1800 RPM
Air Cons 4 CFM

1/4" PISTOL EXTERNAL ADJUSTABLE CLUTCH SCREWDRIVER

Sound 84.3 dB (a)
Vibration <2.5 m/sec²
Length 190 mm
Weight 1 kg
Air Inlet 1/4" BSP



UT8964A

Type Pistol
Size 1/4"
Torque 5-12 Nm
Free Speed 1800 RPM
Air Cons 4 CFM

PISTOL OUTSIDE CLUTCH SCREWDRIVER

Sound 84.3 dB (a)
Vibration 2.5 m/sec²
Length 197 mm
Weight 1.30 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT2960A	Adjustable	Pistol	1/4"	3-11	1800	4	91	<2.5	159	1.36	1/4"
UT2964A	Adjustable	Pistol	1/4"	3-8	1800	4	87	<2.5	205	1.1	1/4"
UT5964A	Adjustable	Pistol	1/4"	10.8	1800	4	84.3	<2.5	190	1	1/4"
UT8964A	Adjustable	Pistol	1/4"	5 - 12	1800	4	84.3	2.5	197	1.30	1/4"



SCREWDRIVERS

UT8955

Type Straight
Size 1/4"
Torque 10 Nm
Free Speed 1800 RPM
Air Cons 4 CFM

ADJUSTABLE CLUTCH SCREWDRIVER

Sound 83 dB (a)
Vibration 2.5 m/sec²
Length 228 mm
Weight 1.10 kg
Air Inlet 1/4" BSP



UT5825-S

Type Pistol
Size 1/4"
Torque 3.4 Nm
Free Speed 1800 RPM
Air Cons 4 CFM

1/4" DIRECT DRIVE SCREWDRIVER

Sound 91 dB (a)
Vibration <2.5 m/sec²
Length 156 mm
Weight 1.36 kg
Air Inlet 1/4" BSP



UT8817-S

Type Pistol
Size 1/4"
Torque 8 Nm
Free Speed 1700 RPM
Air Cons 4 CFM

1/4" DIRECT DRIVE SCREWDRIVER

Sound 76 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 0.92 kg
Air Inlet 1/4" BSP



UT8817-SC

Type Pistol
Size 1/4"
Torque 8 Nm
Free Speed 750 RPM
Air Cons 4 CFM

1/4" DIRECT DRIVE SCREWDRIVER

Sound 76 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 0.92 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8955	Adjustable	Straight	1/4"	Max 10	1800	4	83	2.5	228	1.10	1/4"
UT5825-S	Direct Drive	Pistol	1/4"	4.6	1800	4	91	<2.5	156	1.36	1/4"
UT8817-S	Direct Drive	Pistol	1/4"	Max 7	1700	4	76	2.5	159	0.92	1/4"
UT8817-SC	Direct Drive	Pistol	1/4"	Max 7	1700	4	76	2.5	159	0.92	1/4"

SCREWDRIVERS

UT8818-S

Type Pistol
Size 1/4"
Torque 13 Nm
Free Speed 1700 RPM
Air Cons 4 CFM

1/4" DIRECT DRIVE SCREWDRIVER

Sound 76 dB (a)
Vibration <2.5 m/sec²
Length 159 mm
Weight 0.92 kg
Air Inlet 1/4" BSP



UT8818-SC

Type Pistol
Size 1/4"
Torque 13 Nm
Free Speed 750 RPM
Air Cons 4 CFM

1/4" DIRECT DRIVE SCREWDRIVER

Sound 76 dB (a)
Vibration 2.5 m/sec²
Length 159 mm
Weight 0.92 kg
Air Inlet 1/4" BSP



UT8226

Type Pistol
Size 1/4"
Torque 271 Nm
Free Speed 9500 RPM
Air Cons 3 CFM

1/4" HEX IMPACT PISTOL SCREWDRIVER

Sound 88 dB (a)
Vibration 4.70 m/sec²
Length 165 mm
Weight 1.38 kg
Air Inlet 1/4" BSP



	Type of Clutch	Type	Size	Torque (Nm)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8818-S	Direct Drive	Pistol	1/4"	Max 13	1700	4	76	2.5	159	0.92	1/4"
UT8818-SC	Direct Drive	Pistol	1/4"	Max 13	1700	4	76	2.5	159	0.92	1/4"
UT8226	Impact	Pistol	1/4"	271	9500	3	88	4.70	165	1.38	1/4"

SANDERS

Our UAT line of Industrial Sanders has been developed to provide the widest range of products to meet increasing market demands for quality, accuracy, reliability, low vibration and temperature insulation, as well as general operator comfort. Modern designs of UAT's sanders provide built-in comfort features as well as the highest HP-to-weight ratios on the market. Heavy materials, precision engineering, automobile or RV manufacturing, furniture, and heavy metal fabrication are all ideal for its use. It can also be used for painting, refinishing, and maintenance.

	Pad/Belt Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (α)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT8788	6" (152 mm)	0.50	10000	20	105.4	2.5	285	1.8	1/4"	30
UT8799V	6" (152 mm)	0.30	12000	4	88.5	3.6	89	0.8	1/4"	30
UT8708	6" (152 mm)	5.0	10000	5	78	2.5	150	0.97	1/4"	30
UT8709	6" (152 mm)	0.30	9000	5	80	2.5	250	1.25	1/4"	30
UT8771A	3", 4.5", 5.5" 75, 115, 140 mm	0.50	1500	6	84	2.5	107	1.1	1/4"	31
UT8776KIT	2" (50 mm) , 3" (76 mm)	0.50	20000	3.5	80	2.5	100	0.54	1/4"	31
UT8777	2" (50 mm)	0.30	25000	4	84.7	2.5	135	0.6	1/4"	31
UT8777-RK	2" (50 mm) , 3" (76 mm)	0.30	25000	4	84.7	2.5	135	0.6	1/4"	31
UT8749S	5" (125 mm)	1.0	9000	7	84.1	1.8	280	<2.5	1/4"	32
UT8897S	5" (127 mm)	0.90	20000	18	-	-	197	0.8	1/4"	32
UT8751	7" (177 mm)	-	4500	8	95.7	<2.5	315	2.3	1/4"	32
UT8756-1	7" (177 mm)	1.0	4500	8	97.5	2.5	315	2.3	1/4"	32
UT8766S	7" (177 mm)	1.70	7500	7	78	1.8	318	3.1	3/8"	33
UT5764	10 mm x 330 mm	0.50	25000	6	85	2.5	260	0.9	1/4"	33
UT5765	20 mm x 520 mm	0.70	16000	6	85	2.5	347	1.15	1/4"	33
UT8765	20 mm x 520 mm	0.58	15000	20	87	2.5	360	1.5	1/4"	33
UT9704	30 mm x 540 mm	1.0	1200	6	84	3.1	495	2.3	1/4"	34
UT8701	13 mm x 610 mm	20	20000	20	-	2.5	400	1.4	1/4"	34
UT8718	13 mm x 305 mm	16	20000	16	-	2.5	305	1	1/4"	34
UT8719	19 mm x 458 mm	16	18000	16	-	1.8	390	1.30	1/4"	34
UT5766	60 mm x 260 mm	0.30	7000	10	89	2.08	380	1.1	1/4"	35
UT8794	90 mm x 170 mm	0.40	8500	4	85.4	3.3	165	2.2	1/4"	35
UT8795	100 mm x 180 mm	0.30	8500	5	80	<2.5	180	1.2	1/4"	35
UT010	65 mm x 400 mm	0.30	3000	7	90.4	13.9	380	3.1	1/4"	35



SANDERS

UT8788

Size 6" (152 mm)
Orbit 5 mm
Motor Power 0.50 HP
Free Speed 10000 RPM
Air Cons 20 CFM

DUAL ACTION SANDER 5MM ORBIT

Sound 105.4 dB (a)
Vibration 2.5 m/sec²
Length 285 mm
Weight 1.8 kg
Air Inlet 1/4" BSP



UT8799V

Size 6" (152 mm)
Orbit 5 mm
Motor Power 0.30 HP
Free Speed 12000 RPM
Air Cons 4 CFM

6" D.A PALM SANDER, DUST EXTRACTION

Sound 88.5 dB (a)
Vibration 3.6 m/sec²
Length 89 mm
Weight 0.8 kg
Air Inlet 1/4" BSP



UT8708

Size 6"
Orbit 5 mm
Motor Power 5.0 HP
Free Speed 10.000 RPM
Air Cons 5 CFM

ORBITAL SANDER - CENTRAL VACUUM

Sound 78 dB (a)
Vibration <2.5 m/sec²
Length 150 mm
Weight 0.97 kg
Air Inlet 1/4" BSP



UT8709-DC

Size 6" (152 mm)
Orbit 5 mm
Motor Power 0.30 HP
Free Speed 9000 RPM
Air Cons 5 CFM

6" ORBITAL SANDER 5MM ORBIT

Sound 80 dB (a)
Vibration <2.5 m/sec²
Length 280 mm
Weight 1.3 kg
Air Inlet 1/4" BSP



	Pad Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8788	6" (152 mm)	0.50	10000	20	105.4	2.5	285	1.8	1/4"
UT8799V	6" (152 mm)	0.30	12000	4	88.5	3.6	89	0.8	1/4"
UT8708	6" (152 mm)	5.0	10000	5	78	2.5	150	0.97	1/4"
UT8709-DC	6" (152 mm)	0.30	9000	5	80	2.5	250	1.25	1/4"

SANDERS

UT8771A

Size 3" (76 mm) , 4" (101 mm) ,
5.5" (140 mm)
Motor Power 0.50 hP
Free Speed 15000 RPM
Air Cons 6 CFM

HIGH SPEED SANDER

Sound 84 dB (a)
Vibration <2.5 m/sec²
Length 107 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



UT8776KIT

Pad Size 2" (50 mm) and 3" (76 mm)
Motor Power 0.22 HP
Free Speed 20000 RPM
Air Cons 3.5 CFM

MINI DISC SANDER KIT

Sound 80 dB (a)
Vibration 2.5 m/sec²
Length 100 mm
Weight 0.54 kg
Air Inlet 1/4" BSP



UT8777

Size 2" (50 mm)
Motor Power 0.30 HP
Free Speed 25000 RPM
Air Cons 4 CFM

SMART REPAIR TOOL W/ BRISTLE PAD

Sound 84.7 dB (a)
Vibration 2.5 m/sec²
Length 135 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT8777-RK

Pad Size 2" and 3"
Motor Power 0.30 HP
Free Speed 25000 RPM
Air Cons 4 CFM

SMART REPAIR TOOL KIT

Vibration 2.5 m/sec²
Sound 84.7 dB (a)
Length 135 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



	Pad Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8771A	3", 4.5", 5.5" (76 mm, 101 mm, 140mm)	0.50	1500	6	84	2.5	107	1.1	1/4"
UT8776KIT	2", 3" (50 mm, 76 mm)	0.22	20000	3.5	80	2.5	100	0.54	1/4"
UT8777	2" (50 mm)	0.30	25000	4	84.7	2.5	135	0.6	1/4"
UT8777-RK	2", 3" (50 mm, 76 mm)	0.30	25000	4	84.7	2.5	135	0.6	1/4"

UT8749S

Size 5" (125 mm)
Motor Power 1 HP
Free Speed 9000 RPM
Air Cons 7 CFM

5" ANGLE SANDER

Sound 84.1 dB (a)
Vibration <2.5 m/sec²
Length 280 mm
Weight 1.8 kg
Air Inlet 1/4" BSP



UT8897S

Size 5" (125 mm)
Motor Power 0.90 HP
Free Speed 20000 RPM
Air Cons 18 CFM

5" HIGH SPEED SANDER

Length 197 mm
Weight 0.8 kg
Air Inlet 1/4" BSP



UT8751

Size 7" (177 mm)
Motor Power 0.55 HP
Free Speed 4500 RPM
Air Cons 8 CFM

7" ANGLE SANDER 5/8" SPINDLE THREAD

Sound 95.7 dB (a)
Vibration 2.5 m/sec²
Length 315 mm
Weight 2.3 kg
Air Inlet 1/4" BSP



UT8756-1

Size 7" (177 mm)
Motor Power 1 hP
Free Speed 4500 RPM
Air Cons 8 CFM

7" ANGLE SANDER

Sound 82.3 dB (a)
Vibration <2.5 m/sec²
Length 315 mm
Weight 2.2 kg
Air Inlet 1/4" BSP



	Pad Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB(a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8749S	5"	1.0	9000	7	84.1	<2.5	280	1.8	1/4"
UT8897S	5" (125 mm)	0.90	20000	18	-	-	197	9.8	1/4"
UT8751	7" (177 mm)	0.55	4500	8	95.7	2.5	315	2.3	1/4"
UT8756-1	7" (177 mm)	1.0	4500	8	97.5	2.5	315	2.3	1/4"

SANDERS

UT8766S

Size 7" (177 mm)
Motor Power 1.70 HP
Free Speed 7500 RPM
Air Cons 4 CFM

7" ANGLE SANDER 5/8" SPINDLE THREAD

Sound 78 dB (a)
Vibration 1.8 m/sec²
Length 318 mm
Weight 3.1 kg
Air Inlet 3/8" BSP



UT5764

Size 10 mm x 330 mm
Motor Power 0.50 HP
Free Speed 25000 RPM
Air Cons 6 CFM

BELT SANDER 10MM X 330MM

Sound 85 dB (a)
Vibration 2.5 m/sec²
Length 260 mm
Weight 0.9 kg
Air Inlet 1/4" BSP



UT5765

Size 20 mm x 520 mm
Motor Power 0.70 HP
Free Speed 16000 RPM
Air Cons 6 CFM

BELT SANDER 20MM X 520MM

Sound 85 dB (a)
Vibration 2.5 m/sec²
Length 347 mm
Weight 1.15 kg
Air Inlet 1/4" BSP



UT8765

Size 20 mm X 520 mm
Motor Power 0.58 HP
Free Speed 15000 RPM
Air Cons 20 CFM
Sound 87 dB (a)

BELT SANDER 20MM X 520MM

Vibration <2.5 m/sec²
Length 360 mm
Weight 1.5 kg
Air Inlet 1/4" BSP



	Belt Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8766S	7" (177 mm)	1.70	7500	7	78	1.8	318	3.1	3/8"
UT5764	10 mm X 330 mm	0.50	25000	6	85	2.5	260	0.9	1/4"
UT5765	20 mm X 520 mm	0.70	16000	6	85	2.5	347	1.15	1/4"
UT8765	20 mm X 520 mm	0.58	15000	20	87	2.5	360	1.5	1/4"

UT9704

Size 30 mm X 540 mm
Motor Power 1.0 HP
Free Speed 12000 RPM
Air Cons 6 CFM

BELT SANDER 30MM X 540MM

Sound 84 dB (a)
Vibration 3.1 m/sec²
Length 495 mm
Weight 2.3 kg
Air Inlet 1/4" BSP



UT8701

Size 13 mm X 610 mm
Motor Power 0.50 HP
Free Speed 20000 RPM
Air Cons 20 CFM

OFFSET BELT SANDER 13 mm X 610mm

Vibration <2.5 m/sec²
Length 400 mm
Weight 1.4 kg
Air Inlet 1/4" BSP



UT8718

Size 13 mm X 305 mm
Motor Power 0.25 HP
Free Speed 20000 RPM
Air Cons 16 CFM

BELT SANDER 13 mm X 305 mm

Vibration 2.5 m/sec²
Length 305 mm
Weight 1.0 kg
Air Inlet 1/4" BSP



Option Available
BELT SANDER KIT 13 mm X 305 mm | UT8718K



UT8719

Size 19 mm X 458 mm
Motor Power 0.30 HP
Free Speed 18000 RPM
Air Cons 16 CFM

BELT SANDER 19 mm X 458 mm

Vibration 1.8 m/sec²
Length 390 mm
Weight 1.30 kg
Air Inlet 1/4" BSP



Option Available
BELT SANDER KIT 13 mm X 458 mm | UT8719K



	Belt Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT9704	30 mm x 540 mm	1.0	12000	6	3.1	495	2.3	1/4"
UT8701	13 mm x 610 mm	0.5	20000	20	2.5	400	1.4	1/4"
UT8718	13mm X 305 mm	0.25	20000	16	2.5	305	1.0	1/4"
UT8719	19 mm x 458 mm	0.30	18000	16	1.8	390	1.3	1/4"

SANDERS

UT5766

Size 260 mm X 60 mm
Motor Power 0.30 HP
Free Speed 7000 RPM
Air Cons 10 CFM

60MM BELT SANDER

Sound 89 dB (a)
Vibration 2.08 m/sec²
Length 380 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



UT8794

Size 170 mm X 90 mm
Motor Power 0.40 HP
Free Speed 8500 RPM
Air Cons 4 CFM

BLOCK SANDER NON VACUUM

Sound 85.4 dB (a)
Vibration 3.3 m/sec²
Length 165 mm
Weight 2.2 kg
Air Inlet 1/4" BSP



UT8795

Size 180 mm X 100 mm
Motor Power 0.30 HP
Free Speed 8500 RPM
Air Cons 5 CFM

BLOCK SANDER NON VACUUM

Sound 80 dB (a)
Vibration <2.5 m/sec²
Length 180 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



UT010

Size 400 mm X 65 mm
Motor Power 0.30 HP
Free Speed 3000 RPM
Air Cons 7 CFM

STRAIGHT LINE SANDER

Sound 90.4 dB (a)
Vibration 13.9 m/sec²
Length 380 mm
Weight 3.1 kg
Air Inlet 1/4" BSP



	Belt Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT5766	260 mm x 60 mm	0.30	7000	10	89	2.08	380	1.1	1/4"
UT8794	170 mm x 90 mm	0.40	8500	4	85.4	3.3	165	2.2	1/4"
UT8795	180 mm x 100 mm	0.30	8500	5	80	<2.5	180	1.2	1/4"
UT010	400 mm x 65 mm	0.30	3000	7	90.4	13.9	380	3.1	1/4"

SANDER ACCESSORIES



BELTS



BRISTLE DISCS



SANDING DISCS



BACKING PADS



SURFACE CONDITIONING DISCS

Sander Belts - Pack of

Part. No.

10 mm (for UT8764, UT5764 &
Grit size: 40, 50, 60, 80, 100, 120 & 150

8764 + grit size

20 mm (for UT8765, UT5765 &
Grit size: 40, 50, 60, 80, 100, 120 & 150

8765 + grit size

30 mm (for UT8704 & UT9704)
Grit size: 40, 50, 60, 80, 100 & 120

8704 + grit size

60 mm (for UT5766)
Grit size: 40, 60, 80, 100, 120, 150 & 180

5766 + grit size

(Example: 8764-100 grit belt 10 mm x 328 mm)

Consumables for UT8777 & UT8777-RK

2" Bristle discs
20004 Green (50 grit)

2" & 3" Sanding Discs (packs of 10)

Black 24 grit
Brown 36 grit
Green 50 grit
Yellow 80 grit
White 120 grit

2"

HO-P24
HO-P36
HO-P50
HO-P80
HO-P120

3"

HO-PS4-3
HO-P36-3
HO-P50-3
HO-P80-3
HO-P120-3

2" & 3" Surface Conditioning

	2"	3"
Fine	HOSCF	HOSCF3
Medium	HOSCM	HOSCM3
Coarse	HOSCC	HOSCC3

6" Backing Pads

H0018V	Velcro	No holes
H0021V7	Velcro	7 holes
H0021V15	Velcro	15 holes
H0021	Sticky	No holes
H0021D	Sticky	6 holes

3" Backing Pads

8705-PAD	Velcro	No holes
8705DC-PAD	Velcro	3 holes

POLISHERS

With our polishers, you can enjoy both comfort and quality while applying product. With a compact design and 0.55 HP motors, we created a machine that is both strong and small.

	Size (in.)	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT8780K	3"	0.30	200	3.2	80	0.77	80	0.72	1/4"	38
UT8752-M14	7"	0.55	2100	8	97	2.5	315	2.3	1/4"	38
UT8841-SM	-	0.50	3600	8	97	3.6	253	0.8	1/4"	38

UT8780K

Size 3"
Motor Power 0.30 HP
Free Speed 200 RPM
Air Cons 3.2 CFM
Sound 80db(a)

3" MINI POLISHER KIT

Vibration 0.77 m/sec²
Length 80 mm
Weight 0.72 kg
Air Inlet 1/4" BSP



UT8752-M14

Size 7"
Motor Power 0.55 HP
Free Speed 2100 RPM
Air Cons 8 CFM
Sound 97db(a)

7" ANGLE POLISHER M14 SPINDLE THREAD

Vibration 2.5 m/sec²
Length 315 mm
Weight 2.3 kg
Air Inlet 1/4" BSP



UT8841-SM

Motor Power 0.50 HP
Free Speed 3600 RPM
Air Cons 8 CFM
Sound 97db(a)

SISAL POLISHING MACHINE

Vibration 3.6 m/sec²
Length 253 mm
Weight 0.8 kg
Air Inlet 1/4" BSP



POLISHER ACCESSORIES

SISAL MOPS, POLISHING MOPS, BACKING PADS & ACCESSORIES

7" lambs wool bonnet (UT8752-M14 & UT8841-SM)
 8" lambs wool bonnet (UT8752-M14 & UT8841-SM)
 Compounding mop (UT8752-M14 & UT8741-SM)
 Sisal mop wheel - length 80mm (UT8841-SM)
 Sisal mop adaptor (UT8841-SM)

Part no.
 H0067
 H0068
 H0087
 H0107
 270-45



	Size (in.)	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8780K	3"	0.30	200	3.2	80	0.77	80	0.72	1/4"
UT8752-M14	7"	0.55	2100	8	97	2.5	315	2.3	1/4"
UT8841-SM	-	0.50	3600	8	97	3.6	253	0.8	1/4"

GRINDERS

• The UT line of Industrial Grinders has been developed to offer the widest selection of product choices to meet increased market demands for quality, accuracy and dependability; as well as meeting increasing demands for low vibration, temperature insulation and general operator comfort.

• UT Grinders feature the highest HP to weight ratios, and modern designs offer built-in comfort features such as composite insulated grips, as well as reduced noise and vibration. All UT Grinders fully meet ANSI requirements for guards, spindles, mounting fixtures and spindle run out.

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT5721	Straight	6 mm	0.50	20000	4	93	3	170	0.6	1/4"	41
UT5710B	Straight	6 mm	0.30	25000	3	86	2.5	148.5	0.38	1/4"	41
UT5720B	Straight	6mm	0.50	15000	3.5	78.4	1.5	178	0.6	1/4"	41
UT4425-1	Straight	1/4"	1	25000	5.5	86	2.5	159	0.9	1/4"	41
UT4425E-1	Straight	1/4"	1	25000	5.5	86	2.5	283	1.4	1/4"	41
UT8841-DG	Straight	6 mm	0.50	3600	3.7	86	3.6	273	0.8	1/4"	42
UT8724	Straight	6 mm	0.45	20000	4.5	78	3.5	165	0.5	1/4"	42
UT5735	Straight	6 mm	0.50	25000	4	91	2.5	255	0.66	1/4"	42
UT8728E	Straight	8 mm	0.90	22000	5.5	83.7	2.1	305	1.1	1/4"	42
UT4425E-CW	Straight	3/8"-24	1	25000	6	86	2.5	362	1.46	1/4"	43
UT4425E-CWS	Straight	5/8"-11	1	25000	6	86	2.5	603	2	1/4"	43
UT5715	Angle	6 mm	0.50	22000	4	86	2.5	14	0.5	1/4"	43
UT8777C	Angle	6 mm	0.25	25000	4	84.7	2.5	137	0.6	1/4"	43
UT8724-12	Angle	1/4"	0.45	12000	4.5	78	2.4	165	0.55	1/4"	43
UT8724T-20	Angle	6 mm	0.45	20000	4.5	78	2.4	165	0.5	1/4"	44
UT8779A	Angle	4"	0.40	15000	6	84	2.5	110	1.37	1/4"	44
UT8750-T	Angle	4"	0.75	12000	10	82.9	5.1	220	1.76	1/4"	44
UT9750	Angle	4"	0.90	11000	4	83	83	200	1.6	1/4"	44
UT9750A	Angle	4 1/2"	0.90	11000	4	83	83	200	1.6	1/4"	44
UT9750B	Angle	5"	0.90	11000	4	83	83	200	1.6	1/4"	44

- Our extensive line up covers a range from 0.25 HP precision grinders up to 4.0 HP vertical and horizontal grinders, with choices of steel bodies and angle configurations.
- Various models in the UT Die Grinder and Angle Grinder line feature our "Softouch" coating which provides insulation to the operator, along with reduced vibration, and comfort grip handles.
- We use only the highest grade materials, bearings and precision gears, to meet customer expectations for quality and dependability.
- With a wide range of speed choices, and HP capability the UT line of grinders and sanders are ideal for heavy material removal, precision engineering, automobile, RV industry, furniture, heavy metal fabrication, paint, refinish and MRO uses.

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT8740A10	Angle	4"	0.75	10000	4	83	6.5	238	2	1/4"	45
UT8740A14	Angle	4"	0.75	10000	4	83	6.5	238	2	1/4"	45
UT8740B14	Angle	4 1/2"	0.75	10000	4	83	6.5	238	2	1/4"	45
UT8740C14	Angle	5"	0.75	10000	4	83	6.5	238	2	1/4"	45
UT8784-4M	Angle	4"	2.40	13500	10	87	2.5	249	1.6	1/4"	46
UT8784-5M	Angle	5"	2.40	12000	10	87	2.5	249	1.8	1/4"	46
UT8766	Angle	7"	1.70	7500	7	84	2.5	318	3.1	3/8"	46
UT8766-25	Angle	7"	2.5	6000	10	84	2.5	327	3.6	3/8"	46
UT8766-259	Angle	9"	2.5	6000	10	84	2.5	327	3.6	3/8"	46
UT8768-3V-60-6	Straight	6"	3	6000	20	86	2.5	324	4.1	1/2"	46
UT8768-3V-60-7	Straight	7"	3	6000	20	86	2.5	305	3.85	1/2"	46
UT8768-4V-60-6	Straight	6"	4	6000	24	86	2.6	324	4.8	1/2"	46
UT8768-4V-60-7	Straight	7"	4	6000	24	86	2.6	305	4.8	1/2"	46
UT8768-3V-60-9	Straight	9"	3	6000	20	86	2.5	330	4.1	1/2"	47
UT8768-4V-60-9	Straight	9"	4	6000	24	86	2.6	330	5	1/2"	47
UT919C	Straight	9"	6.00	6000	14	89.7	89.7	300	5.8	1/2"	47
UT100S-18	Straight	3/8"	1.00	18000	10	82	1.4	338	1.47	3/8 NPT	47
UT200H-60-6	Angle	1.8"	2	6000	10	86	2.5	495	6.1	1/4" NPT	47
UT200H-90-CW	Angle	1.8"	2	9000	10	86	2.5	445	4.1	1/4" NPT	47
UT200H-90-CWE	Angle	1.8"	2	9000	10	86	2.5	660	4.3	1/4" NPT	47
UT8707K	Angle	3 mm	0.10	70000	5.7	88	1.8	150	0.2	1/4"	48
UT8714	Precision	1/8"	0.25	70000	12	-	-	121	0.20	1/4"	48
UT8706K-2	Straight	1.8"	0.10	54000	4	72	2.5	133	0.2	1/4"	48
UT1075K	Angle	1.8"	-	70000	3	72	2.5	133	0.18	1/4"	48
UT8716-BKC	Angle	2"	0.30	18000	4	81	8.5	125	0.6	1/4"	49
UT8775-ABK	Straight	1/4"	0.50	4000	4	81	2.5	270	1.2	1/4"	49
UT5721-TB	Straight	6 mm	0.50	20000	4	93	3	170	0.6	1/4"	49

GRINDERS

UT5721

Type Straight
Size 6mm
Motor Power 0.50 HP
Free Speed 20000 RPM
Air Cons 4 CFM

6 MM DIE GRINDER

Sound 93 dB (a)
Vibration 3 m/sec²
Length 170 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT5710B

Type Straight
Size 6mm
Motor Power 0.30 HP
Free Speed 25000 RPM
Air Cons 3 CFM

6 MM REAR EXHAUST DIE GRINDER

Sound 86 dB (a)
Vibration 2.5 m/sec²
Length 148.5 mm
Weight 0.38 kg
Air Inlet 1/4" BSP



Also Available:
Rear Exhaust Die Grinder c/w 3mm Collet| UT5710B-3

UT5720B

Type Straight
Size 6mm
Motor Power 0.50 HP
Free Speed 15000 RPM
Air Cons 3.5 CFM

6 MM DIE GRINDER

Sound 78.4 dB (a)
Vibration 1.5 m/sec²
Length 178 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT4425-1

Type Straight
Size 1/4"
Motor Power 1.0 HP
Free Speed 25000 RPM
Air Cons 5.5 CFM

1/4" STEEL INDUSTRIAL DIE GRINDER

Length 159 mm
Weight 0.9 kg
Air Inlet 1/4" BSP



Also Available:
Extended Steel Die Grinder| UT4425E-1

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT5721	Straight	6mm	0.50	20000	4	93	3	170	0.6	1/4"
UT5710B	Straight	6 mm	0.30	25000	3	86	2.5	148.5	0.38	1/4"
UT5720B	Straight	6mm	0.50	15000	3.5	78.4	1.5	178	0.6	1/4"
UT4425-1	Straight	1/4"	1.0	25000	5.5	86	2.5	159	0.9	1/4"
UT4425E-1	Straight	1/4"	1.0	25000	6	86	2.5	283	1.4	1/4"

UT8841-DG

Type Straight
Size 6 mm
Motor Power 0.50 HP
Free Speed 3600 RPM

6 MM DIE GRINDER

Sound 86 dB (a)
Vibration 3.6 m/sec²
Length 273 mm
Weight 0.8 kg
Air Inlet 1/4" BSP



UT8724

Type Straight
Size 6 mm
Motor Power 0.45 HP
Free Speed 20000 RPM
Air Cons 4.5 CFM

6MM INDUSTRIAL DIE GRINDER

Sound 78 dB (a)
Vibration 3.5 m/sec²
Length 165 mm
Weight 0.5 kg
Air Inlet 1/4" BSP



UT5735

Type Straight
Size 6mm
Motor Power 0.50 HP
Free Speed 25000 RPM
Air Cons 4 CFM

6 MM EXTENDED DIE GRINDER

Sound 91 dB (a)
Vibration 2.5 m/sec²
Length 255 mm
Weight 0.66 kg
Air Inlet 1/4" BSP



UT8728E

Type Straight
Size 8mm
Motor Power 0.90 HP
Free Speed 22000 RPM
Air Cons 5.5 CFM

8MM COMPOSITE EXTENDED DIE GRINDER

Sound 83.7 dB (a)
Vibration 2.1 m/sec²
Length 305 mm
Weight 1.1 kg
Air Inlet 1/4" BSP



Also Available:
6MM COMPOSITE EXTENDED DIE GRINDER | UT8728E-6

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8841-DG	Straight	3/8 x 24	0.50	3600	3.7	86	3.6	273	0.8	1/4"
UT8724	Straight	6mm	0.45	20000	4.5	78	3.5	165	0.5	1/4"
UT5735	Straight	6mm	0.50	25000	4	91	2.5	255	0.66	1/4"
UT8728E	Straight	8mm	0.90	22000	5.5	83.7	2.1	305	1.1	1/4"

GRINDERS


UT4425E-CW

Type Straight
Size 3/8"-24
Motor Power 1.0 HP
Free Speed 25000 RPM
Air Cons 6 CFM

1/4" STEEL DIE GRINDER EXTENDED LENGTH CONE WHEEL

Length 362 mm
Weight 1.46 kg
Air Inlet 1/4" BSP

Also Available:
Extended Steel Die Grinder Extended Length Cone Wheel | UT4425E-CWS



UT5715

Type Angle
Size 6 mm
Motor Power 0.50 HP
Free Speed 22000 RPM
Air Cons 4 CFM

6 MM ANGLE DIE GRINDER

Sound 86 dB (a)
Vibration 2.5 m/sec²
Length 140 mm
Weight 0.5 kg
Air Inlet 1/4" BSP



UT8777C

Type Angle
Size 6 mm
Motor Power 0.25 HP
Free Speed 25000 RPM
Air Cons 4 CFM

6 MM ANGLE DIE GRINDER

Sound 84.7 dB (a)
Vibration 2.5 m/sec²
Length 137 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT8724-12

Type Straight
Size 6 mm
Motor Power 0.45 HP
Free Speed 12000 RPM
Air Cons 4.5 CFM

6 MM ANGLE DIE GRINDER

Sound 78 dB (a)
Vibration 2.4 m/sec²
Length 165 mm
Weight 0.55 kg
Air Inlet 1/4" BSP



	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT4425E-CW	Straight	3/8" - 24	1.0	25000	6	86	2.5	362	1.46	1/4"
UT4425E-CWS	Straight	5/8" - 11	1.0	25000	6	86	2.5	603	2.0	1/4"
UT5715	Angle	6 mm	0.50	22000	4	86	2.5	140	0.5	1/4"
UT8777C	Angle	6 mm	0.25	25000	4	84.7	2.5	137	0.6	1/4"
UT8724-12	Straight	6 mm	0.45	12000	4.5	78	2.4	165	0.55	1/4"

UT8724T-20

Type Straight
Size 2"-20
Motor Power 0.45 HP
Free Speed 20000 RPM
Air Cons 4.5 CFM

ANGLE DIE GRINDER THREADED 2" - 20

Sound 78 dB (a)
Vibration 2.4 m/sec²
Length 165 mm
Weight 0.55 kg
Air Inlet 1/4" BSP



UT8779A

Type Angle
Size 4"
Motor Power 0.40 HP
Free Speed 15000 RPM
Air Cons 6 CFM

4" HIGH SPEED GRINDER

Sound 84 dB (a)
Vibration 2.5 m/sec²
Length 110 mm
Weight 1.37 kg
Air Inlet 1/4" BSP



UT8750-T

Type Angle
Size 4"
Motor Power 0.75 HP
Free Speed 12000 RPM
Air Cons 10 CFM

4" ANGLE GRINDER M10 THREAD

Sound 82.9 dB (a)
Vibration 5.1 m/sec²
Length 220 mm
Weight 1.76 kg
Air Inlet 1/4" BSP



UT9750

Type Angle
Size 4"
Motor Power 0.90 HP
Free Speed 11000 RPM
Air Cons 4 CFM

4" ANGLE GRINDER M10 THREAD

Sound 83 dB (a)
Vibration 83 m/sec²
Length 200 mm
Weight 1.6 kg
Air Inlet 1/4" BSP



Also Available:
 4 1/2" Angle Grinder M14 Thread | UT9750A
 5" Angle Grinder M14 Thread | UT9750B

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8724-20	Angle	2" - 20	0.45	20000	4.5	78	2.4	165	0.5	1/4"
UT8779A	Angle	4"	0.40	15000	6	84	2.5	110	1.37	1/4"
UT8724	Straight	6mm	0.45	20000	4.5	78	3.5	165	0.5	1/4"
UT8750-T	Angle	4"	0.75	12000	10	82.9	5.1	220	1.76	1/4"
UT9750	Angle	4"	0.90	11000	4	83	1.2	200	1.6	1/4"
UT9750A	Angle	4 1/2"	0.90	11000	4	83	1.2	200	1.6	1/4"
UT9750B	Angle	5"	0.90	11000	4	83	2.5	200	1.6	1/4"

GRINDERS



UT8740A10

**4" ANGLE
GRINDER M10**

UT8740A14

**4" ANGLE
GRINDER M14**

UT8740B14

**4 1/2" ANGLE
GRINDER M14**

UT8740C14

**5" ANGLE
GRINDER M14**

Type Angle

Motor Power 0.75 HP

Free Speed 10000 RPM

Air Cons 4 CFM

Sound 83 dB (a)

Vibration 6.5 m/sec²

Length 238 mm

Weight 2 kg

Air Inlet 1/4" BSP



GRINDERS

UT8784-4M

Type Angle
Size 4"
Motor Power 2.40 HP
Free Speed 13500 RPM
Air Cons 10 CFM

4" ANGLE GRINDER

Sound 87 dB (a)
Vibration 5.5 m/sec²
Length 249 mm
Weight 1.6 kg
Air Inlet 3/8" BSP



Also Available:
5" Angle Grinder | UT8784-5M

UT8766

Type Angle
Size 7"
Motor Power 1.70 HP
Free Speed 7500 RPM
Air Cons 7 CFM

7" ANGLE GRINDER 1.7HP

Sound 84 dB (a)
Vibration 2.5 m/sec²
Length 318 mm
Weight 3.1 kg
Air Inlet 3/8" BSP



Also Available:
7" Angle Grinder 2.5 HP - M14 spindle | UT8766-25
9" Angle Grinder 2.5 HP - M14 spindle | UT8766-259

UT8768-3V-60-6

Type Vertical
Size 6"
Motor Power 3.0 HP
Free Speed 6000 RPM
Air Cons 20 CFM

VERTICAL GRINDER

Sound 86 dB (a)
Vibration <2.5 m/sec²
Length 330 mm
Weight 4.1 kg
Air Inlet 1/2" BSP



Also Available:
4HP Vertical Grinder 6" | UT8768-4V-60-6

UT8768-3V-60-7

Type Vertical
Size 7"
Motor Power 3.0 HP
Free Speed 6000 RPM
Air Cons 7.5 CFM

VERTICAL GRINDER

Sound 86 dB (a)
Vibration <2.5 m/sec²
Length 305 mm
Weight 3.85 kg
Air Inlet 1/2" BSP



Also Available:
4HP Vertical Grinder 7" | UT8768-4V-60-7

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8784-4M	Angle	4"	2.40	13500	10	87	5.5	249	1.6	3/8"
UT8784-5M	Angle	5"	2.40	12000	10	87	5.5	249	1.6	3/8"
UT8766	Angle	7"	1.70	7500	7	84	2.5	318	3.1	3/8"
UT8766-25	Angle	7"	2.50	7000	10	84	2.5	327	3.5	3/8"
UT8766-259	Angle	9"	2.50	6000	10	84	2.5	327	3.6	3/8"
UT8768-3V-60-6	Straight	6"	3	6000	20	86	2.5	324	4.1	1/2"
UT8768-4V-60-6	Straight	6"	4	6000	24	86	2.5	324	4.1	1/2"
UT8768-3V-60-7	Straight	7"	3	6000	20	86	2.5	305	3.85	1/2"
UT8768-4V-60-7	Straight	7"	4	6000	24	86	2.5	305	3.85	1/2"

GRINDERS

UT8768-3V-60-9

Type Vertical
Size 9"
Motor Power 3.0 HP
Free Speed 6000 RPM
Air Cons 7.5 CFM

VERTICAL GRINDER

Sound 86 dB (a)
Vibration <2.5 m/sec²
Length 330 mm
Weight 4.1 kg
Air Inlet 1/2" BSP



Also Available:
4HP Vertical Grinder 9" | UT8768-4V-60-9

UT919C

Type Vertical
Size 9"
Motor Power 6.0 HP
Free Speed 6000 RPM
Air Cons 14 CFM

9" VERTICAL GRINDER

Sound 89.7 dB (a)
Vibration 4.9 m/sec²
Length 300 mm
Weight 5.8 kg
Air Inlet 1/2" BSP



UT100S-18

Type Straight
Size 3/8"
Motor Power 1.0 HP
Free Speed 18000 RPM
Air Cons 10 CFM

1HP STRAIGHT GRINDER

Sound 82 dB (a)
Vibration 1.4 m/sec²
Length 338 mm
Weight 1.47 kg
Air Inlet 3/8 NPT



UT200H-60-6

Type Straight
Size 1/8"
Motor Power 2.0 HP
Free Speed 6000 RPM
Air Cons 10 CFM

6" HD STRAIGHT GRINDER 2HP

Sound 89 dB (a)
Vibration 1.9 m/sec²
Length 495 mm
Weight 6.1 kg
Air Inlet 1/4" NPT



UT200H-90-CW

Type Straight
Size 1/8"
Motor Power 2.0 HP
Free Speed 9000 RPM
Air Cons 10 CFM

CONE WHEEL HD STRAIGHT GRINDER 2HP

Sound 89 dB (a)
Vibration 2.1 m/sec²
Length 445 mm
Weight 4.1 kg
Air Inlet 1/4" NPT



Also Available:
Extended Length Horizontal Cone Wheel Grinder 2HP | UT200H-90-CWE

	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8768-3V-60-9	Straight	9"	3.0	6000	20	86	2.5	330	4.1	1/2"
UT8768-4V-60-9	Straight	9"	4.0	6000	24	86	2.5	330	4.1	1/2"
UT919C	Straight	9"	6.0	6000	14	89.7	4.9	300	5.8	1/2"
UT100S-18	Straight	3/8"	1.0	18000	10	82	1.4	338	1.47	3/8 NPT
UT200H-60-6	Straight	1/8"	2.0	6000	10	89	1.9	495	6.1	1/4" NPT
UT200H-90-CW	Straight	1/8"	2.	9000	10	89	2.1	445	4.1	1/4" NPT
UT200H-90-CWE	Straight	1/8"	2.0	9000	10	89	2.1	660	4.3	1/4" NPT

UT8707

Type Angle
Size 3mm
Motor Power 0.10 HP
Free Speed 70000 RPM
Air Cons 5.7 CFM

ANGLE HEAD TURBINE GRINDER (70000 RPM)

Sound 88 dB (a)
Vibration 1.8 m/sec²
Length 150 mm
Weight 0.20 kg
Air Inlet 1/4" BSP



UT8706K-2

Type Straight
Size 1/8"
Motor Power 0.30 HP
Free Speed 54000 RPM
Air Cons 4 CFM

TURBINE GRINDER KIT (54000 RPM)

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 133 mm
Weight 0.2 kg
Air Inlet 1/4" BSP



UT8714

Type Precision
Size 1/8"
Motor Power 0.25 HP
Free Speed 70000 RPM
Air Cons 12 CFM

PENCIL GRINDER

Exhaust Rear
Length 121 mm
Weight 0.20 kg
Air Inlet 1/4" BSP



UT1075K

Type Angle
Size 1/8"
Free Speed 70000 RPM
Air Cons 3 CFM

ANGLE HEAD PENCIL GRINDER KIT

Sound 72 dB (a)
Vibration 2.5 m/sec²
Length 133 mm
Weight 0.18 kg
Air Inlet 1/4" BSP



	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8707	Angle	3mm	0.10	70000	5.7	88	1.8	150	0.20	1/4"
UT8706K-2	Straight	1/8"	0.30	54000	4	72	2.5	133	0.20	1/4"
UT8714	Precision	1/8"	0.25	70000	12	-	-	121	0.20	1/4"
UT1075K	Angle	1/8"	-	70000	3	72	2.5	133	0.18	1/4"

GRINDERS

UT8716-BKC

Type Angle
Size 2"
Motor Power 0.30 HP
Free Speed 18000 RPM
Air Cons 4 CFM

2" GRINDING AND CUTTING KIT

Sound 81 dB (a)
Vibration 8.5 m/sec²
Length 125 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT8775-ABK

Type Straight
Size 1/4"
Motor Power 0.50 HP
Free Speed 4000 RPM
Air Cons 4 CFM

MULTI-FUNCTIONAL GRINDER KIT

Sound 81 dB (a)
Vibration 2.5 m/sec²
Length 270 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



UT5721-TB

Type Straight
Size 6 mm
Motor Power 0.50 HP
Free Speed 20000 RPM
Air Cons 4 CFM

6 MM STRAIGHT TYRE BUFFER

Sound 93 dB (a)
Vibration 3 m/sec²
Length 170 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



	Type	Size	Motor Power (HP)	Free Speed (RPM)	Air Cons (CFM)	Sound dB (a)	Exhaust	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8716-BKC	Angle	2"	0.30	18000	4	81	8.5	125	0.6	1/4"	1/4"
UT8775-ABK	Straight	1/4"	0.50	4000	4	81	81	270	1.2	1/4"	1/4"
UT5721-TB	Straight	6mm	0.90	20000	4	93	-	3	170	0.6	1/4"


GRINDER ACCESSORIES

COLLETS



Various Collets Available In The Following Sizes:
1/8", 1/4", 1mm, 3mm, 6mm, 8mm

2" CUTTING & GRINDING DISCS

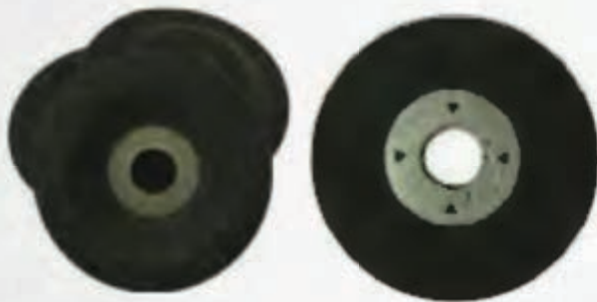

For use with
UT8716-BKC

Part No.

Grinding
60 grit
80 grit
120 grit

5A-7283A39-11
5A-7283A39-12
5A-7283A39-13

Cutting

H0070

SPARES FOR UT8775-ABK




Stripping Wheel
ST-BT246652



Eraser Wheel
ST-BTRE115-30



Eraser Adaptor
ST-BT246655A-K03A



Fine Wire Bristels | BTWW103-23-5
Medium Wire Bristels | BTWW103-23-5.5
Coarse Wire Bristels | BTWW103-23-7

Tyre Buffer



Assembly (cone and arbor)
(fits all die grinders and drills)

Replacement cone only

Part No.

H0036

H0037

Water Feed & Tool Series

UT7713W5

Type Stone
Size 4-1/2 (110 mm)
Free Speed 13000 RPM
Air Cons 5 CFM

AIR WET STONE CUTTER

Sound 80 dB (a)
Length 234 mm
Weight 2.2 kg
Air Inlet 1/4" BSP



**ACCESSORIES
(OPTIONAL)**
13-W511
 Getter Blade (110 x 20mm)

UT7510WS-M14

Size 5"
Air Cons 4 CFM
Free Speed 10,000 RPM
Thread M14X2.0

5" AIR WET ANGLE SANDER

Length 270 mm
Weight 2.1 kg
Air Inlet 1/4" BSP



Water Feed

UT776WS

Size 7"
Air Cons 4 CFM
Free Speed 6000 RPM
Thread 5/8"-11

7" AIR WET ANGLE SANDER

Length 390 mm
Weight 3.9 kg
Air Inlet 1/4" BSP



Water Feed
Type Regulator

UT5718WSP

Size 5"
Air Cons 4 CFM
Free Speed 1800 RPM
Thread 5/8"-11

5" AIR WET STONE SANDER/POLISHER

Length 350 mm
Weight 2.2 kg
Air Inlet 1/4" BSP



Water Feed
Type Regulator

Versions Available: **UT7542WSP** | 5" AIR WET STONE SANDER (4200 RPM)
UT758WSP | 5" AIR WET STONE SANDER (8000 RPM)
UT7511WSP | 5" AIR WET STONE SANDER (11000 RPM)

	Pad Size	Free Speed (RPM)	Air Cons (CFM)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT7510WS-M14	5" (130 mm)	10000	4	270	2.1	1/4"
UT776WS	7" (177 mm)	6000	4	390	3.9	1/4"
UT5718WSP	5" (130 mm)	1800	4	350	2.2	1/4"

CUTTING TOOLS

If you're looking to cut only lightly and quickly with a cutting tool, our line of air saws and cutting tools can provide you with that power. With engines up to 1HP, we guarantee that you'll have the power you need.

	Motor Power (HP)	Free Speed (RPM)	Strokes Per Minute	Product Aluminium Cut	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT1054	0.51	22000	26,000	N/A	4	87	2.5	177	0.9	1/4"	77
UT5761A	1.0	14000	N/A	6	4	89.5	3.65	377	1.7	1/4"	77
UT5762	0.50	20000	N/A	3	4.5	93	3	171	0.6	1/4"	77
UT8600-1	0.40	2600	3500	2	4	87	4	193	0.93	1/2"	77
UT8606	0.50	2600	N/A	1.6 Steel	3.7	91	1.2	226	0.9	1/4"	78
UT8841-S	0.50	3600	N/A	1.6 Steel	3.7	86	3.6	273	0.8	1/4"	78

	Capacity in Aluminium (mm)	Capacity in Steel (mm)	Strokes	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP	Page
UT5920	2	1.6	10000	4	79	24.1	199	0.6	1/4"	79
UT5922LV	2	-	10000	4	85	1.2	265	1.2	1/4"	79
UT9155	6	5	5000	4	82	3.9	309	1.08	1/4"	79



CUTTING TOOLS

UT5762

Motor Power 0.5 HP
Free Speed 20000 RPM
Strokes Per Minute N/A
Air Cons 4.5 CFM
Sound 93 dB (a)

3" CUT OFF TOOL

Vibration 3 m/sec²
Length 171 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



UT5761A

Motor Power 1.0 HP
Free Speed 14000 RPM
Strokes Per Minute N/A
Air Cons 4 CFM
Sound 89.5 dB (a)

EXTENDED CUT OFF TOOL W/ 4" CUTTING DISC

Vibration 3.65 m/sec²
Length 377 mm
Weight 1.7 kg
Air Inlet 1/4" BSP



UT8841-S

Motor Power 0.5 HP
Free Speed 3600 RPM
Strokes Per Minute N/A
Air Cons 3.7 CFM
Sound 86 dB (a)

STRAIGHT SHEAR

Vibration 3.6 m/sec²
Length 273 mm
Weight 0.8 kg
Air Inlet 1/4" BSP



UT8606

Motor Power 0.5 HP
Free Speed 2600 RPM
Strokes Per Minute N/A
Air Cons 3.7 CFM
Sound 91 dB (a)

PISTOL SHEAR

Vibration 1.2 m/sec²
Length 226 mm
Weight 0.9 kg
Air Inlet 1/4" BSP



	Motor Power (HP)	Free Speed (RPM)	Strokes Per Minute	Product Aluminium Cut	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT5761A	1.0	14000	N/A	6	4	89.5	3.65	377	1.7	1/4"
UT5762	0.5	20000	N/A	3	4.5	93	3	171	0.6	1/4"
UT8600-1	0.4	2600	3500	2	4	87	4	193	0.93	1/2"
UT1054	0.51	22000	26,000	N/A	4	87	2.5	177	0.9	1/4"


CUTTING TOOLS

UT1054

Motor Power 0.51 HP
Free Speed 22000 RPM
Strokes Per Minute 26000
Air Cons 4 CFM
Sound 87 db(a)

LAMINATE TRIMMER (ROUTER)

Vibration 2.5 m/sec²
Length 177 mm
Weight 0.9 kg
Air Inlet 1/4" BSP

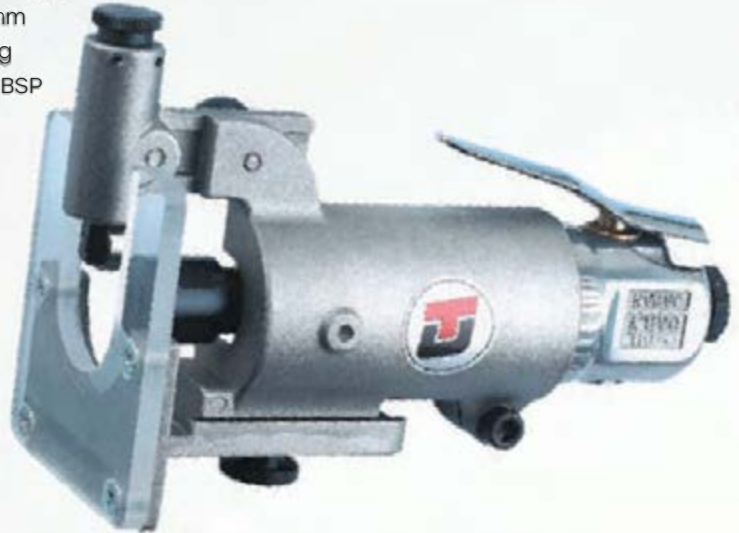

	Motor Power (HP)	Free Speed (RPM)	Strokes Per Minute	Product Aluminium Cut	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT8606	0.5	2600	N/A	1.6 Steel	3.7	91	1.2	226	0.9	1/4"
UT8841-S	0.5	3600	N/A	1.6 Steel	3.7	86	3.6	273	0.8	1/4"

CUTTING TOOLS - ACCESSORIES



Complete shear head for
 UT8606 and UT8841-S
HA10



3" Cutting Disc for UT5762
H0069N

4" Cutting Disc for UT5761A
5L-3011B39N

AIR SAWS

UT9155

RECIPROCATING SAW

Capacity in Aluminium 6 mm
Capacity in Steel 5 mm
Strokes 5000
Air Cons 4 CFM
Sound 82 dB (a)

Vibration 3.9 m/sec²
Length 309 mm
Weight 1.08 kg
Air Inlet 1/4" BSP



UT5922LV

LOW VIBRATION SAW

Capacity in Aluminium 2 mm
Capacity in Steel 1.6 mm
Strokes 10000
Air Cons 4 CFM
Sound 85 dB (a)

Vibration 1.2 m/sec²
Length 265 mm
Weight 1.2 kg
Air Inlet 1/4" BSP



UT5920

HIGH SPEED RECIPROCATING SAW

Capacity in Aluminium 2 mm
Capacity in steel 1.6 mm
Strokes 10000
Air Cons 4 CFM
Sound 79 dB (a)

Vibration 24.1 m/sec²
Length 199 mm
Weight 0.6 kg
Air Inlet 1/4" BSP



	Capacity in Aluminium (mm)	Capacity in Steel (mm)	Strokes	Air Cons (CFM)	Sound dB (a)	Vibration (m/sec ²)	Length (mm)	Weight (kg)	Air Inlet (in.) BSP
UT9155	6	5	5000	4	82	3.9	309	1.08	1/4"
UT5922LV	2	1.6	10000	4	85	1.2	265	1.2	1/4"
UT5920	2	1.6	10000	4	79	24.1	199	0.6	1/4"

AIR SAW - ACCESSORIES



BI-METAL SAW BLADES (for UT5920 & UT5922LV)

Part no.

18 TPI **H0403-18**
 24 TPI **H0403-24**
 32 TPI only sold singles **H0403-32**